



**EchoLife HG8040H/HG8012H/HG8010H GPON
Terminal**

V300R013C00

Product Description

Issue 01

Date 2013-08-08

Copyright © Huawei Technologies Co., Ltd. 2013. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: <http://www.huawei.com>

Email: support@huawei.com

About This Document

Product Version

The following table lists the product versions related to this document.

Product Name	Product Version
EchoLife HG8040H/HG8012H/HG8010H	V300R013C00

Overview




GPON terminal EchoLife ONT is an indoor optical network terminal (ONT) designed for home users. This document provides the appearance, key features, and technical specifications of the ONT, which helps you know the ONT quickly.



NOTE

Each ONT supports different types and counts of ports. Contents in this document may not be supported by all ONTs. For differences between ONTs, see [1.3 Specifications Differences Between Different Product Models](#).

Symbol Conventions

The following symbols may be found in this document. They are defined as follows:

Symbol	Description
 DANGER	DANGER indicates a hazard with a high level or medium level of risk which, if not avoided, could result in death or serious injury.
 WARNING	WARNING indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
 CAUTION	CAUTION indicates a potentially hazardous situation that, if not avoided, could result equipment damage, data loss, performance degradation, or unexpected results.

Symbol	Description
 TIP	Indicates a tip that may help you solve a problem or save your time.
 NOTE	Provides additional information to emphasize or supplement important points of the main text.

Change History

Changes between document issues are cumulative. Therefore, the latest document issue contains all changes made in previous issues.

Issue 01 (2013-08-08)

This is the first official release for the V300R013C00 version.

Contents

About This Document.....	ii
1 Introduction.....	1
1.1 Product Positioning.....	2
1.2 Network Applications.....	2
1.3 Specifications Differences Between Different Product Models.....	3
1.4 Product Overview.....	3
1.4.1 HG8040H.....	3
1.4.2 HG8012H.....	8
1.4.3 HG8010H.....	12
2 Product Functions and Features.....	18
3 Product Highlights.....	19
3.1 Comprehensive Triple Play Service.....	20
3.2 Quality CATV Service Transmission.....	20
3.3 Convenient Automatic Provisioning, Maintenance, and Management of the Remote Service.....	20
4 Port Specifications.....	21
4.1 GPON Port Specifications.....	22
4.2 GE Port Specifications.....	22
4.3 CATV Port Specifications.....	23
5 Acronyms and Abbreviations.....	24

1 Introduction

[1.1 Product Positioning](#)

[1.2 Network Applications](#)

[1.3 Specifications Differences Between Different Product Models](#)

This topic introduces the specification differences between ONTs in V300R013C00, specifically, features supported by different ONTs.

[1.4 Product Overview](#)

This topic introduces the appearances, ports, and LEDs of ONTs in V300R013C00.

1.1 Product Positioning

EchoLife GPON terminal V300R013C00 is an indoor optical network terminal (ONT) designed for home users. Its upper shell adopts the natural heat dissipation material, and its optical port adopts the dust-proof design with a rubber plug. The ONT is eye-pleasing and energy-efficient. It can be deployed on a workbench or mounted on a wall, meeting users' deployment requirements in different scenarios.

The ONT provides the more convenient and efficient remote management function. It supports the ONT Management and Control Interface (OMCI) protocols and manages all home terminals in a unified manner, implementing remote fault diagnosis, service provisioning, and performance statistics.


By using the Gigabit-capable Passive Optical Network (GPON) technology, the ONT provides a high-speed data channel through a single optical fiber with an upstream rate of 1.244 Gbit/s and a downstream rate of 2.488 Gbit/s. In this way, you can enjoy the high-speed data service, quality voice service, and superior video service.

1.2 Network Applications

As a network terminal, the ONT is deployed at the GPON access layer and connects the home user to the Internet through the optical upstream port.

Figure 1-1 shows the position of the ONT on a network.

Figure 1-1 Network topology of the ONT

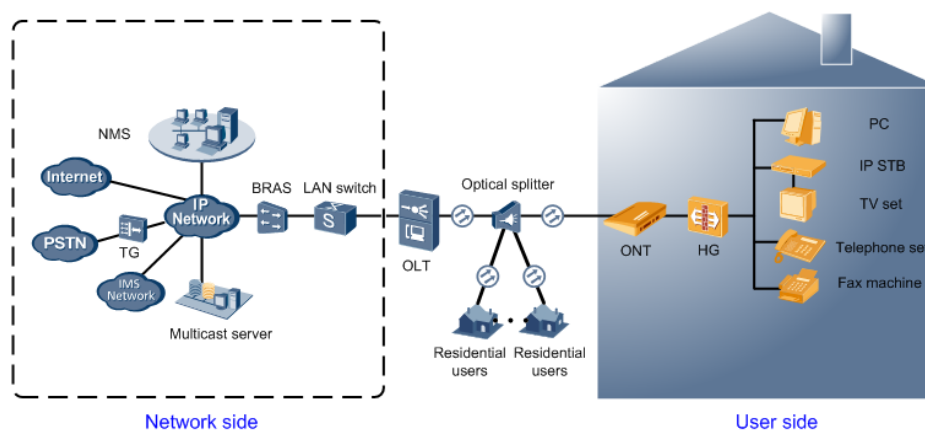

- In the upstream direction, the ONT is connected to the optical splitter and the networkside OLT through the passive optical network (PON) port, namely the OPTICAL port, to provide the integrated access service.
- In the downstream direction, the ONT is connected to the HG through the LAN port so as to provide various interfaces to connect different terminals, implementing the triple play service.

Ethernet port, which can be connected to terminals such as the PC, STB, and video phone to provide the high-speed data and video services.

 **NOTE**

Each Ethernet port allows only 1 user access.

1.3 Specifications Differences Between Different Product Models

This topic introduces the specification differences between ONTs in V300R013C00, specifically, features supported by different ONTs.

ONT Type	Ethernet Access	CATV	3.2 Quality CATV Service Transmission	4.2 GE Port Specifications	4.3 CATV Port Specifications
HG8040H	4xGE	No	No	Yes	No
HG8012H	1xGE	1xCATV	Yes	Yes	Yes
HG8010H	1xGE	No	No	Yes	No

 **NOTE**

- In the preceding table, Yes indicates that the feature is supported while No indicates not supported.
- The preceding table lists only differences supported by products.

1.4 Product Overview


This topic introduces the appearances, ports, and LEDs of ONTs in V300R013C00.

1.4.1 HG8040H

Introduced the appearance, interfaces, LEDs and device parameters of the HG8040H.

Appearance

Figure 1-2 Appearance of the HG8040H

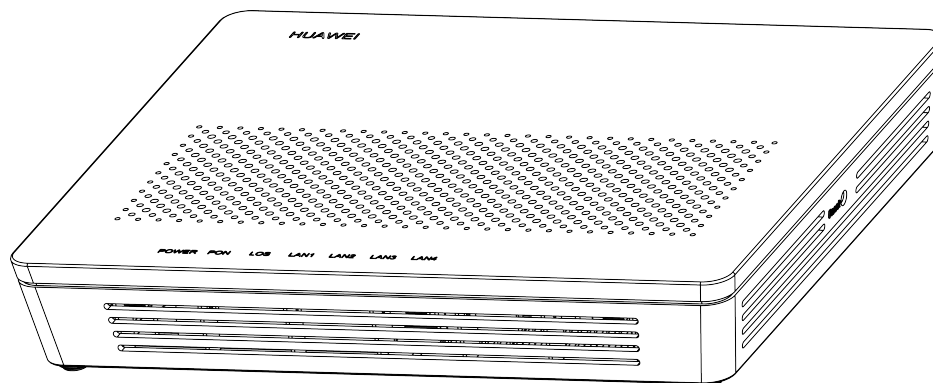

Port/Button

Figure 1-3 and **Figure 1-4** show the ports on the rear panel and side panel of the HG8040H respectively.

Figure 1-3 Ports and buttons on the rear panel of the HG8040H

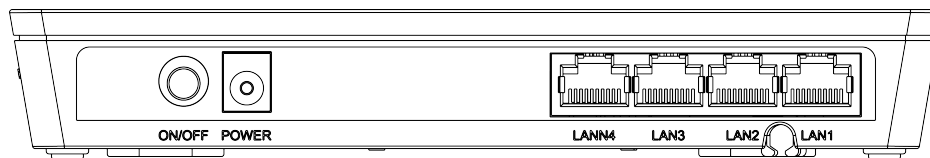


Table 1-1 Description of ports and buttons on the rear panel of the HG8040H

Port/Button	Function
ON/OFF	Indicates the power button. It is used to power on or power off the device.
POWER	Indicates the power port, used to connect to the power adapter or backup battery unit.
LAN1–LAN4	Indicates auto-sensing 10/100/1000M Base-T Ethernet ports (RJ-45), used to connect to PCs or IP set-top boxes (STBs).

Figure 1-4 Ports and buttons on the side cover of the HG8040H

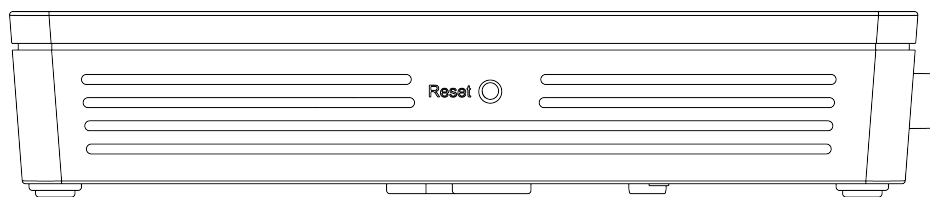


Table 1-2 Description of ports and buttons on the side cover of the HG8040H

Port/Button	Function
Reset	Indicates the reset button. Press the button for a short time to reset the device; press the button for a long time (longer than 10s) to restore the device to the default settings and reset the device.

Figure 1-5 shows optical ports on the HG8040H.

Figure 1-5 Optical ports on the HG8040H

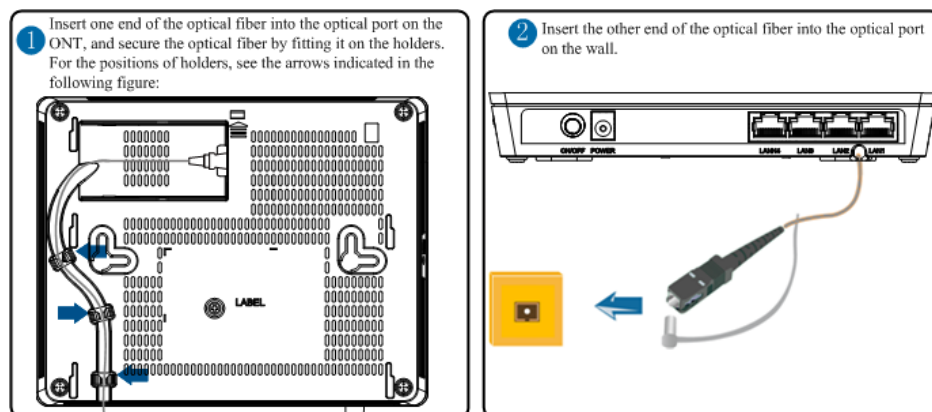


Table 1-3 Optical ports on the HG8040H

Port/Button	Function
OPTICAL	<p>Indicates an optical port. The optical port is equipped with a rubber plug and is connected to an optical fiber for upstream transmission.</p> <p>The type of the optical connector connected to the OPTICAL port is SC/APC.</p>

LEDs

Figure 1-6 LEDs on the HG8040H

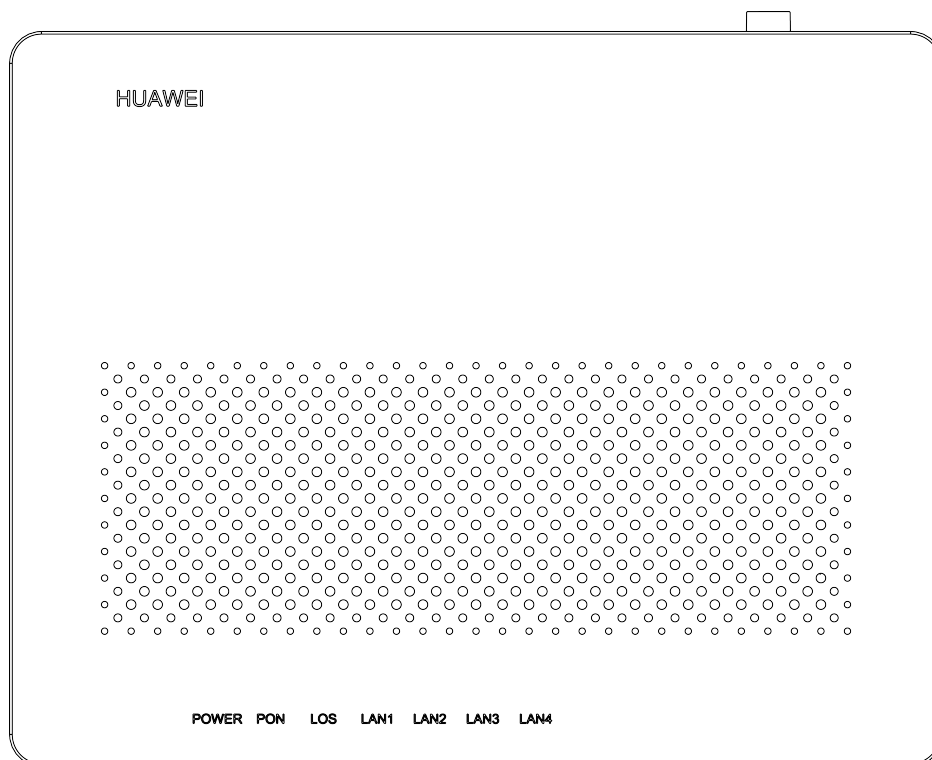


Table 1-4 Indications of the LEDs on the HG8040H

LED	Description	Status	Description
POWER	Power supply LED	Always on	The device is powered on.
		Off	The power supply is cut off.
PON	Authentication LED	See Table 1-5 .	
LOS	Connection LED	See Table 1-5 .	
LAN1–LAN4	Ethernet port LED	Always on	The Ethernet connection is in the normal state.
		Blinking	Data is being transmitted on the Ethernet port.
		Off	The Ethernet connection is not set up.

Table 1-5 Indications of the PON and LOS LEDs

No.	LED Status		Description
	PON	LOS	
1	Off	Off	The ONT is disabled by the OLT.
2	Blinks quickly (twice per second)	Off	The ONT is attempting to set up a connection to the OLT.
3	Always on	Off	The connection between the ONT and the OLT is set up.
4	Off	Blinks slowly (once two seconds)	The Rx optical power of the ONT is lower than the optical receiver sensitivity. The ONT is not connected to optical fibers or does not receive optical signals.
5	Blinks quickly (twice per second)	Blinks quickly (twice per second)	The OLT detects that the device is a rogue ONT.
6	Blinks quickly (twice per second)	Blinks slowly (once two seconds)	The Rx optical power of the ONT does not within the range (–27 dBm to –8 dBm) of the Rx sensitivity.
7	Blinks slowly (once two seconds)	Blinks slowly (once two seconds)	The hardware is faulty.

Device parameters

The device parameters include the ONT's size, weight, operating environment, and power parameters and equipment power consumption.

Table 1-6 HG8040H device parameters

Parameter	Specifications
Dimensions (length x width x height)	176 mm x 138.5 mm x 28 mm
Weight	About 500 g
Working environment	Operating temperature: 0°C to +40°C
	Environment humidity: 5% RH to 95% RH (non-condensing)
	Pressure environment: 86 kPa to 106 kPa
	Altitude: 2000 m


Parameter	Specifications
Power Specifications	Power adapter input: 100 V AC to 240 V AC, 50 Hz to 60 Hz
	System power supply: 11 V DC to 14 V DC, 1 A
Power consumption	<ul style="list-style-type: none"> ● Static power consumption: 4 W ● Maximum power consumption: 6.5 W

1.4.2 HG8012H

Introduced the appearance, interfaces, LEDs and device parameters of the HG8012H.

Appearance

Figure 1-7 Appearance of the HG8012H

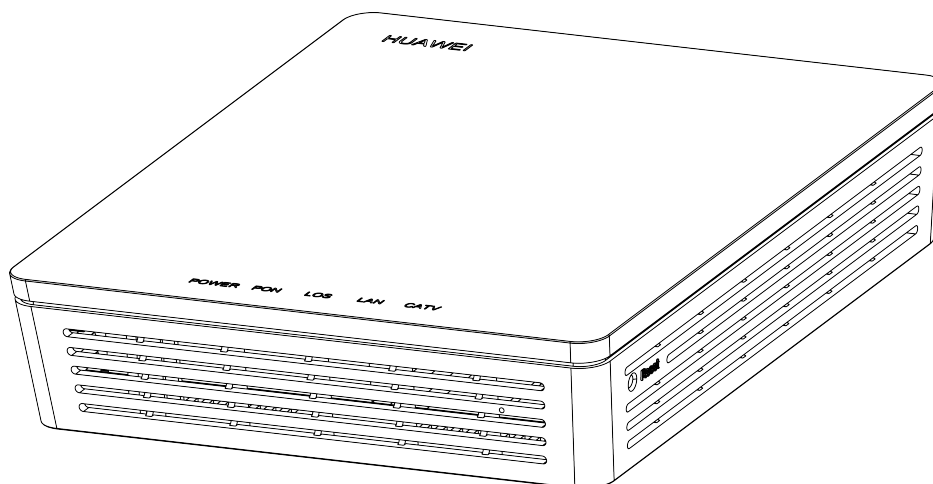

Port/Button

Figure 1-8 and **Figure 1-9** show the ports on the rear panel and side panel of the HG8012H respectively.

Figure 1-8 Ports and buttons on the rear panel of the HG8012H

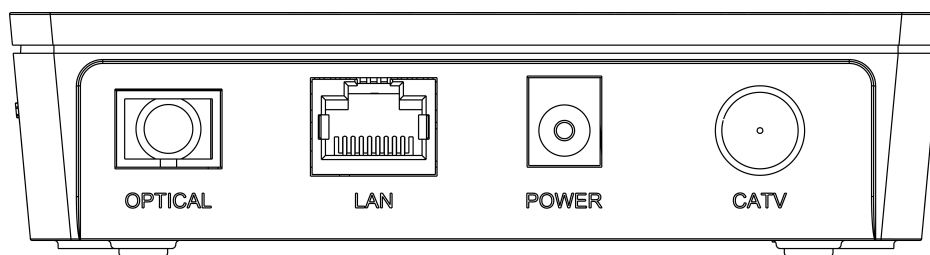


Table 1-7 Description of ports and buttons on the rear panel of the HG8012H

Port/Button	Function
OPTICAL	Indicates an optical port. The optical port is equipped with a rubber plug and is connected to an optical fiber for upstream transmission. The type of the optical connector connected to the OPTICAL port is SC/APC.
LAN	Indicates auto-sensing 10/100/1000M Base-T Ethernet ports (RJ-45), used to connect to PCs or IP set-top boxes (STBs).
POWER	Indicates the power port, used to connect to the power adapter or backup battery unit.
CATV	Indicates an RF port, used to connect to a TV set.

Figure 1-9 Ports and buttons on the side cover of the HG8012H

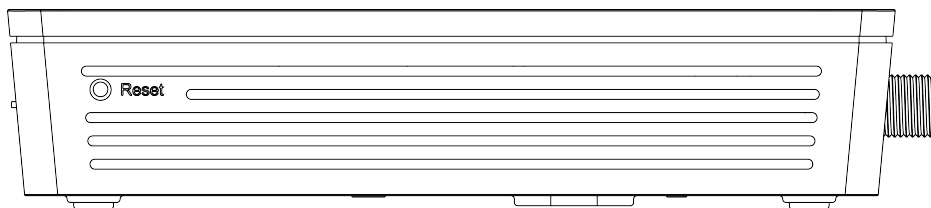


Table 1-8 Description of ports and buttons on the side cover of the HG8012H

Port/Button	Function
Reset	Indicates the reset button. Press the button for a short time to reset the device; press the button for a long time (longer than 10s) to restore the device to the default settings and reset the device.

LEDs

Figure 1-10 LEDs on the HG8012H

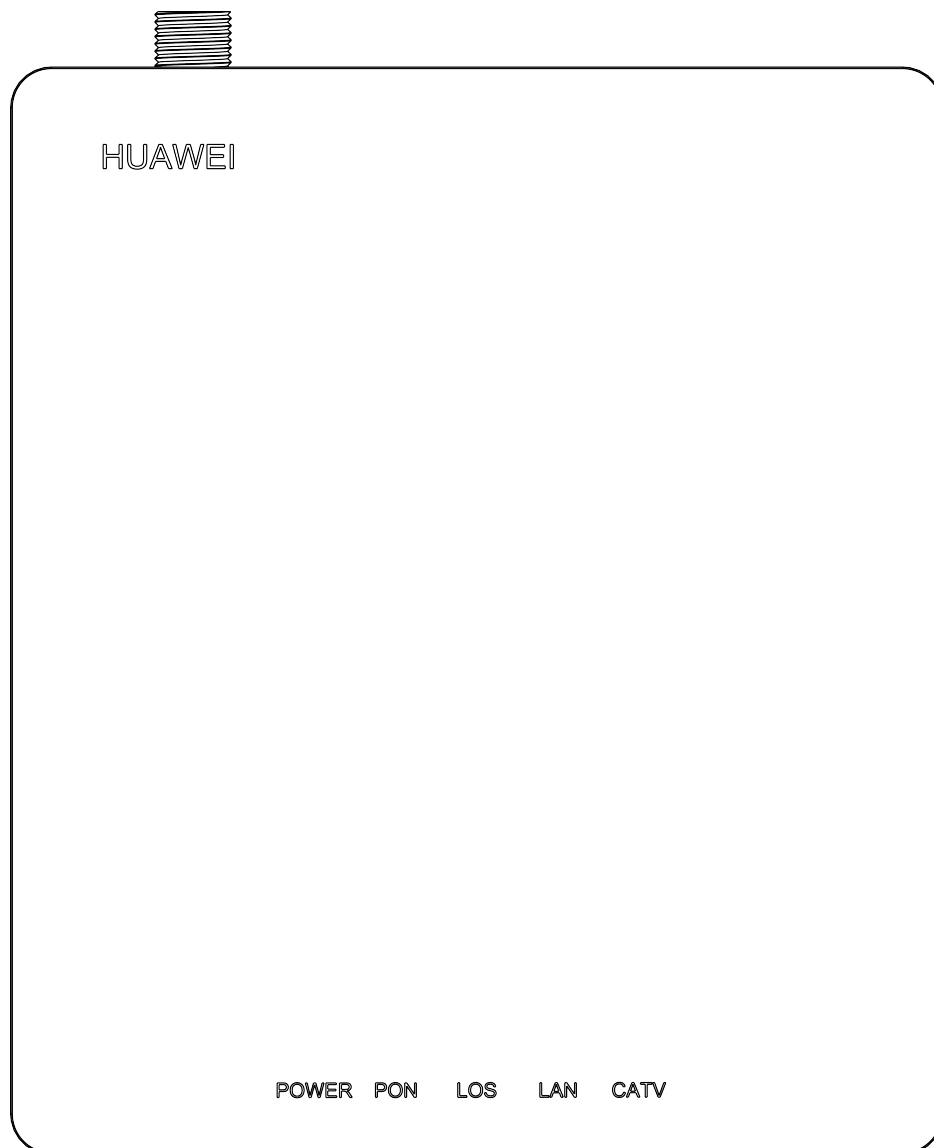


Table 1-9 Indications of the LEDs on the HG8012H

LED	Description	Status	Description
POWER	Power supply LED	Always on	The device is powered on.
		Off	The power supply is cut off.
PON	Authentication LED	See Table 1-10 .	

LED	Description	Status	Description
LOS	Connection LED	See Table 1-10 .	
LAN	Ethernet port LED	Always on	The Ethernet connection is in the normal state.
		Blinking	Data is being transmitted on the Ethernet port.
		Off	The Ethernet connection is not set up.
CATV	CATV port LED	Always on	The CATV function is enabled and CATV signals are received.
		Off	The CATV function is disabled or CATV signals are not received.

Table 1-10 Indications of the PON and LOS LEDs

No.	LED Status		Description
	PON	LOS	
1	Off	Off	The ONT is disabled by the OLT.
2	Blinks quickly (twice per second)	Off	The ONT is attempting to set up a connection to the OLT.
3	Always on	Off	The connection between the ONT and the OLT is set up.
4	Off	Blinks slowly (once two seconds)	The Rx optical power of the ONT is lower than the optical receiver sensitivity. The ONT is not connected to optical fibers or does not receive optical signals.
5	Blinks quickly (twice per second)	Blinks quickly (twice per second)	The OLT detects that the device is a rogue ONT.
6	Blinks quickly (twice per second)	Blinks slowly (once two seconds)	The Rx optical power of the ONT does not within the range (-27 dBm to -8 dBm) of the Rx sensitivity.
7	Blinks slowly (once two seconds)	Blinks slowly (once two seconds)	The hardware is faulty.

Device parameters

The device parameters include the ONT's size, weight, operating environment, and power parameters and equipment power consumption.

Table 1-11 HG8012H device parameters


Parameter	Specifications
Dimensions (length x width x height)	135 mm x 115 mm x 30 mm
Weight	About 500 g
Working environment	Operating temperature: 0°C to 40°C
	Environment humidity: 5% RH to 95% RH (non-condensing)
	Pressure environment: 86 kPa to 106 kPa
	Altitude: 2000 m
Power specifications	Power adapter input: 100 V AC to 240 V AC, 50 Hz to 60 Hz
	System power supply: 11 V DC to 14 V DC, 1 A
Power consumption	<ul style="list-style-type: none"> ● Static power consumption: 3 W ● Maximum power consumption: 6 W

1.4.3 HG8010H

Introduced the appearance, interfaces, LEDs and device parameters of the HG8010H.

Appearance

Figure 1-11 Appearance of the HG8010H

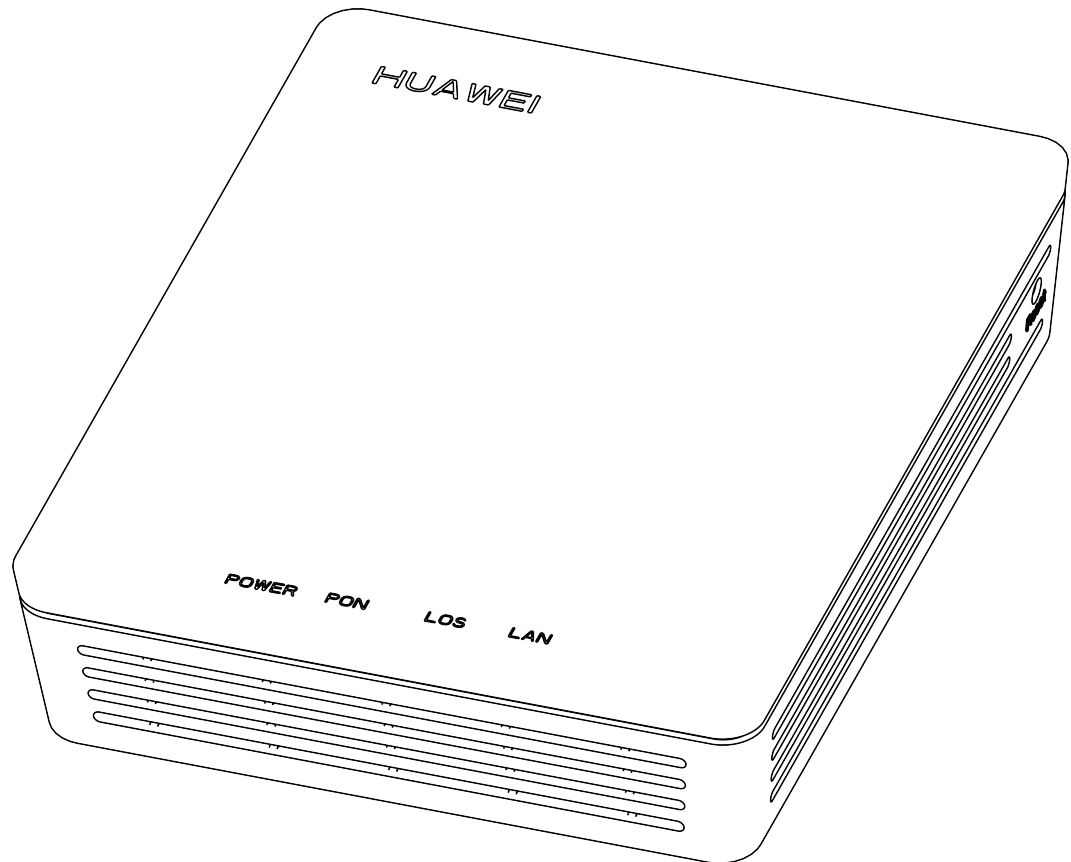

Port/Button

Figure 1-12 and **Figure 1-13** show the ports on the rear panel and side panel of the HG8010H respectively.

Figure 1-12 Ports and buttons on the rear panel of the HG8010H

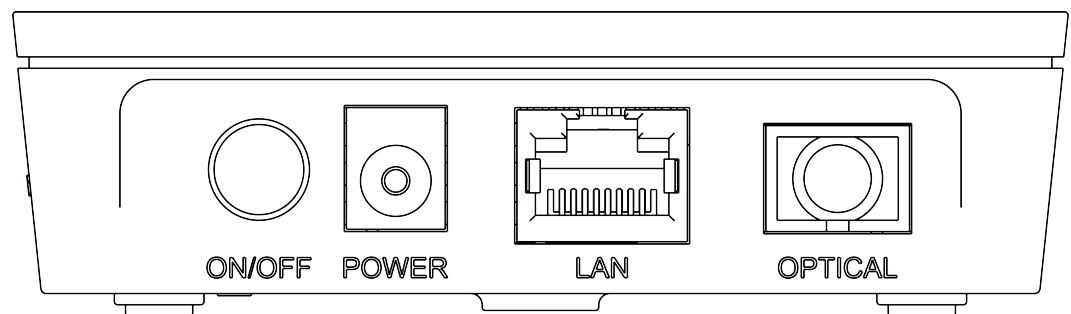


Table 1-12 Description of ports and buttons on the rear panel of the HG8010H

Port/Button	Function
OPTICAL	Indicates an optical port. The optical port is equipped with a rubber plug and is connected to an optical fiber for upstream transmission. The type of the optical connector connected to the OPTICAL port is SC/APC.
LAN	Indicates auto-sensing 10/100/1000M Base-T Ethernet ports (RJ-45), used to connect to PCs or IP set-top boxes (STBs).
POWER	Indicates the power port, used to connect to the power adapter or backup battery unit.
ON/OFF	Indicates the power button. It is used to power on or power off the device.

Figure 1-13 Ports and buttons on the side cover of the HG8010H

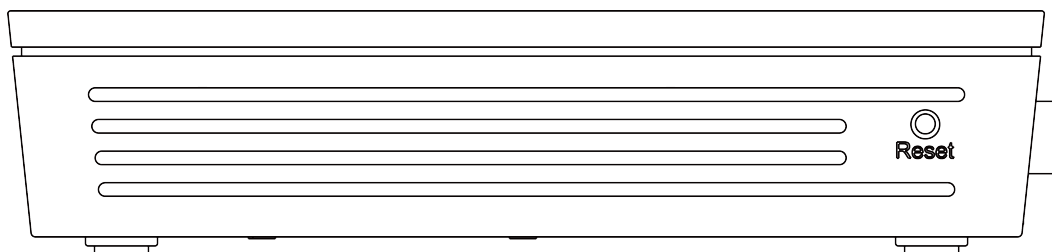


Table 1-13 Description of ports and buttons on the side cover of the HG8010H

Port/Button	Function
RESET	Indicates the reset button. Press the button for a short time to reset the device; press the button for a long time (longer than 10s) to restore the device to the default settings and reset the device.

LEDs

Figure 1-14 LEDs on the HG8010H

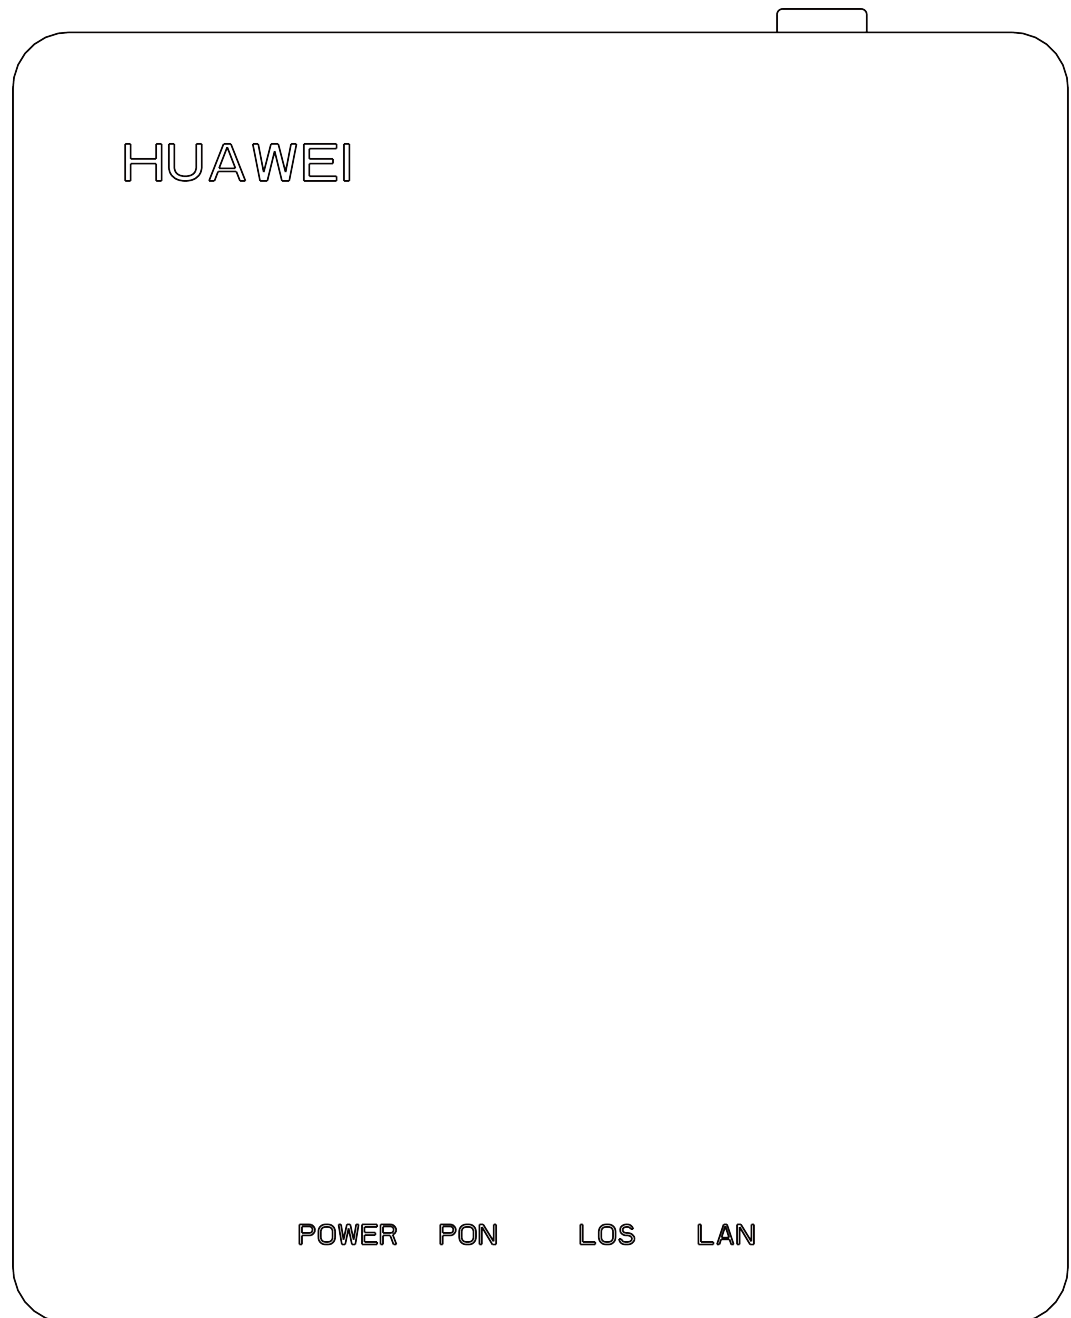


Table 1-14 Indications of the LEDs on the HG8010H

LED	Description	Status	Description
POWER	Power supply LED	Green: always on	The device is powered on.

LED	Description	Status	Description
		Orange: always on	The power supply is cut off.
PON	Authentication LED	See Table 1-15 .	
LOS	Connection LED	See Table 1-15 .	
LAN	Ethernet port LED	Always on	The Ethernet connection is in the normal state.
		Blinks	Data is being transmitted on the Ethernet port.
		Off	The Ethernet connection is not set up.

Table 1-15 Indications of the PON and LOS LEDs

No.	LED Status		Description
	PON	LOS	
1	Off	Off	The ONT is disabled by the OLT.
2	Blinks quickly (twice per second)	Off	The ONT is attempting to set up a connection to the OLT.
3	Always on	Off	The connection between the ONT and the OLT is set up.
4	Off	Blinks slowly (once two seconds)	The Rx optical power of the ONT is lower than the optical receiver sensitivity. The ONT is not connected to optical fibers or does not receive optical signals.
5	Blinks quickly (twice per second)	Blinks quickly (twice per second)	The OLT detects that the device is a rogue ONT.
6	Blinks quickly (twice per second)	Blinks slowly (once two seconds)	The Rx optical power of the ONT does not within the range (-27 dBm to -8 dBm) of the Rx sensitivity.
7	Blinks slowly (once two seconds)	Blinks slowly (once two seconds)	The hardware is faulty.

Device parameters

The device parameters include the ONT's size, weight, operating environment, and power parameters and equipment power consumption.

Table 1-16 HG8010H device parameters

Parameter	Specifications
Dimensions (length x width x height)	115 mm x 94 mm x 27 mm
Weight	About 500 g
Working environment	Operating temperature: 0°C to +40°C
	Environment humidity: 5% RH to 95% RH (non-condensing)
	Pressure environment: 86 kPa to 106 kPa
	Altitude: 2000 m
Power Specifications	Power adapter input: 100 V AC to 240 V AC, 50 Hz to 60 Hz
	System power supply: 11 V DC to 14 V DC, 1 A
Power consumption	<ul style="list-style-type: none"> ● Static power consumption: 3 W ● Maximum power consumption: 3.5 W

2 Product Functions and Features

This chapter describes the key characteristics of the V300R013C00 version supported by the ONT.

Type	Features
GPON features	<ul style="list-style-type: none"> ● Class B+ optical power budget ● Authentication modes of SN, password, and SN+password
Multicast features	<ul style="list-style-type: none"> ● IGMP V2&V3 snooping ● Dynamically controllable multicast
Security features	<ul style="list-style-type: none"> ● MAC address filtering ● Anti-DoS
Device maintenance	<ul style="list-style-type: none"> ● Local service configuration, query, and software upgrade on the webpage ● Automatic remote service provisioning, device management, and software upgrade through OMCI ● Query of the information about the ONT optical transceiver ● Intelligent monitoring
Reliable features	<ul style="list-style-type: none"> ● Dual system protection of the software
Ethernet features	<ul style="list-style-type: none"> ● VLAN filtering, VLAN transparent transmission ● VLAN N:1 aggregation and VLAN 1:1 switch

 **NOTE**

For details about the features, see the *Feature Description*.

3 Product Highlights

3.1 Comprehensive Triple Play Service

On the LAN side, the ONT is connected to the HG through the LAN port to implement multiple access services, including the Internet access, voice, and video services, providing users with the comprehensive triple play service.

3.2 Quality CATV Service Transmission

The ONT provides the quality CATV service transmission through the CATV port.

3.3 Convenient Automatic Provisioning, Maintenance, and Management of the Remote Service

The ONT applies the OMCI management, manages terminal services without additional IP networks, which facilitates automatic provisioning, maintenance, and management of the remote service.

3.1 Comprehensive Triple Play Service

On the LAN side, the ONT is connected to the HG through the LAN port to implement multiple access services, including the Internet access, voice, and video services, providing users with the comprehensive triple play service.

3.2 Quality CATV Service Transmission

The ONT provides the quality CATV service transmission through the CATV port.

The CATV service transmission of the ONT has the following features:

- Controls and queries the status of the CATV port remotely.
- Connects to multiple through one CATV port.
- Supports the optical port of the APC type with a return loss larger than 60 dB, ensuring the quality of the CATV service.

 **NOTE**

Only HG8012H supports CATV.

3.3 Convenient Automatic Provisioning, Maintenance, and Management of the Remote Service

The ONT applies the OMCI management, manages terminal services without additional IP networks, which facilitates automatic provisioning, maintenance, and management of the remote service.

The remote service management of the ONT has the following features:

- Supports user-defined upgrade policies configured through the NMS. The device is automatically upgraded after being powered on and no manual operation is required.
- Supports remote performance management of the ONT through the NMS. By collecting the performance data, the network performance exception can be monitored in real time.
- Supports remote fault locating of the ONT through the NMS. Through alarm reporting and remote loopback diagnosis, the fault can be located remotely, which decreases the maintenance cost.

4 Port Specifications

This section describes the interface indicators parameter of the ONT.

[4.1 GPON Port Specifications](#)

This topic describes specifications and standards compliance of the GPON interfaces.

[4.2 GE Port Specifications](#)

This topic describes the specifications and standards compliance of Gigabit Ethernet (GE) ports.

[4.3 CATV Port Specifications](#)

This topic describes the specifications of cable TV (CATV) ports.

4.1 GPON Port Specifications

This topic describes specifications and standards compliance of the GPON interfaces.

Table 4-1 GPON port specifications

Parameter	Specifications
Transmission rate	Rx: 2.488 Gbit/s Tx: 1.244 Gbit/s
Connector	SC/APC
Maximum reach	20 km
Standard compliance	ITU-T G.984.2 CLASS B+
Center wavelength	Tx: 1310 nm Rx: 1490 nm
Tx optical power	0.5 dBm to 5.0 dBm
Extinction ratio	> 10 dB
Minimum receiver sensitivity	-27 dBm
Maximum overload optical power	-8 dBm

4.2 GE Port Specifications

This topic describes the specifications and standards compliance of Gigabit Ethernet (GE) ports.

Table 4-2 Specifications of a GE port

Parameter	Specifications
Connector type	RJ-45
Port rate	10 Mbit/s, 100 Mbit/s, or 1000 Mbit/s
Maximum transmission distance	100 m
Working mode	Auto-adaptive 10 Mbit/s, 100 Mbit/s or 1000 Mbit/s
Cable specifications	Category 5 UTP
Compliant standard	IEEE 802.3i IEEE 802.3u IEEE 802.3ab

4.3 CATV Port Specifications

This topic describes the specifications of cable TV (CATV) ports.

Table 4-3 Specifications of a CATV port

Parameter	Specifications
Connector type	F-type
Bandwidth	54-870 MHz
Output resistance	75 ohms
Cable specifications	CATV cable

 **NOTE**

Only HG8012H supports CATV.

5 Acronyms and Abbreviations

C

CATV Community Antenna Television

D

DBA Dynamic Bandwidth Assignment

DoS Denial of Service

F

FTTH Fiber To The Home

G

GPON Gigabit-capable Passive Optical Network

I

IGMP Internet Group Management Protocol

N

NMS Network Management System

O

OAM Operations, Administration, and Maintenance

OLT Optical Line Terminal

OMCI Optical Network Termination Management and Control Interface

ONT Optical Network Terminal

P

PLOAM Physical Layer OAM

PON Passive Optical Network

V

VLAN Virtual Local Area Network