




netis®

Easy Network, Trustable

WF2411

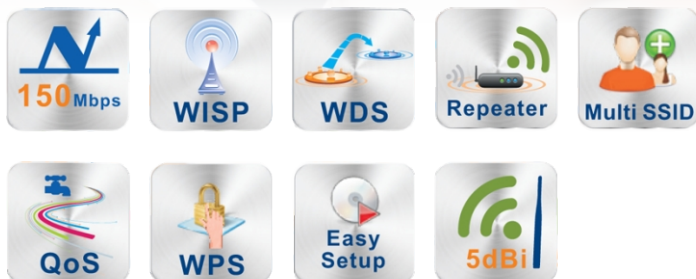

150Mbps Wireless N Router

Funkce:

- > Wireless-N router s rychlostí až 150Mbps
- > Multi-Wireless přenosové režimy: AP, WDS, AP + WDS, Client, Repeater
- > Snadné nastavení zabezpečení sítě díky šifrovacímu tlačítku WPS
- > Jedna pevná 5dBi anténa
- > Snadné nastavení a instalace díky instalačnímu CD

Ve zkratce:

Wireless-N router 150Mbps WF-2411, je kombinované kabelové a bezdrátové zařízení pro využití v SOHO sítích. Router kompatibilní se zařízeními 802.11b/g/n a poskytuje přenosové rychlosti až 150Mbps, nabízí lepší výkon pro surfování na webu, email a sdílení souborů. Snadné nastavení a instalace díky instalačnímu CD a WPS tlačítku, vytvoříte síť během chvíle.

Technické parametry:

Wireless

Standard	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n			
Signal Rate	Up to 150Mbps			
Frequency Range	2.4-2.4835GHz			
Transmit Power	20dBm (MAX)			
Data Transfer Rate	802.11n: 40MHz (150Mbps, 135Mbps, 120Mbps, 90Mbps, 60Mbps, 45Mbps, 30Mbps, 15Mbps) 20MHz (72Mbps, 65Mbps, 57Mbps, 43Mbps, 28Mbps, 21Mbps, 14Mbps, 7Mbps) 801.11g: (54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 11Mbps, 9Mbps, 6Mbps) 802.11b: (11Mbps, 9Mbps, 6Mbps, 5.5Mbps, 2Mbps, 1Mbps)			
Wireless Mode	AP, WDS, AP+WDS, Repeater, Client, Multiple AP			
Wireless Security	64 /128-bit WEP	WPA-PSK/WPA2-PSK (TKIP/AES)	SSID Broadcast Enable/Disable	Wireless MAC Filtering

Hardware

Standard	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX
Interface	1 * 10/100M Auto MDI/MDIX RJ45 WAN port 4 * 10/100M Auto MDI/MDIX RJ45 LAN port
LED	SYS,WPS, WAN, LAN1-LAN4
Button	Default, WPS
Antenna	1 * external 5dBi antenna
Power Supply	DC 9V/500mA (Output)
Dimensions(L x W x H)	133 x 99 x 27 mm
Weight	149g


Software

WAN Type	DHCP(Dynamic IP), PPPoE, Static IP, WISP
Port Forwarding	Virtual Servers, Port Triggering, UPnP, DMZ, FTP Private Port
QoS	WMM, Bandwidth Control
Access Control	IP/ MAC/ Domain filtering
VPN Pass-through	PPTP, L2TP, IPSEC
Others	DDNS, Static Routing, WOL, Remote Management, Firmware upgrade

Others

Certification	FCC, CE, KC				
Environment	Operating Temperature: 0°C~40°C			Storage Temperature: -40°C~70°C	
	Operating Humidity: 10%~90% non-condensing			Storage Humidity: 5%~90% non-condensing	
Package	1 *WF2411	1 *Setup CD	1 * Power Adapter	1 * Ethernet Cable	1 *Quick installation Guide

Topologický graf:

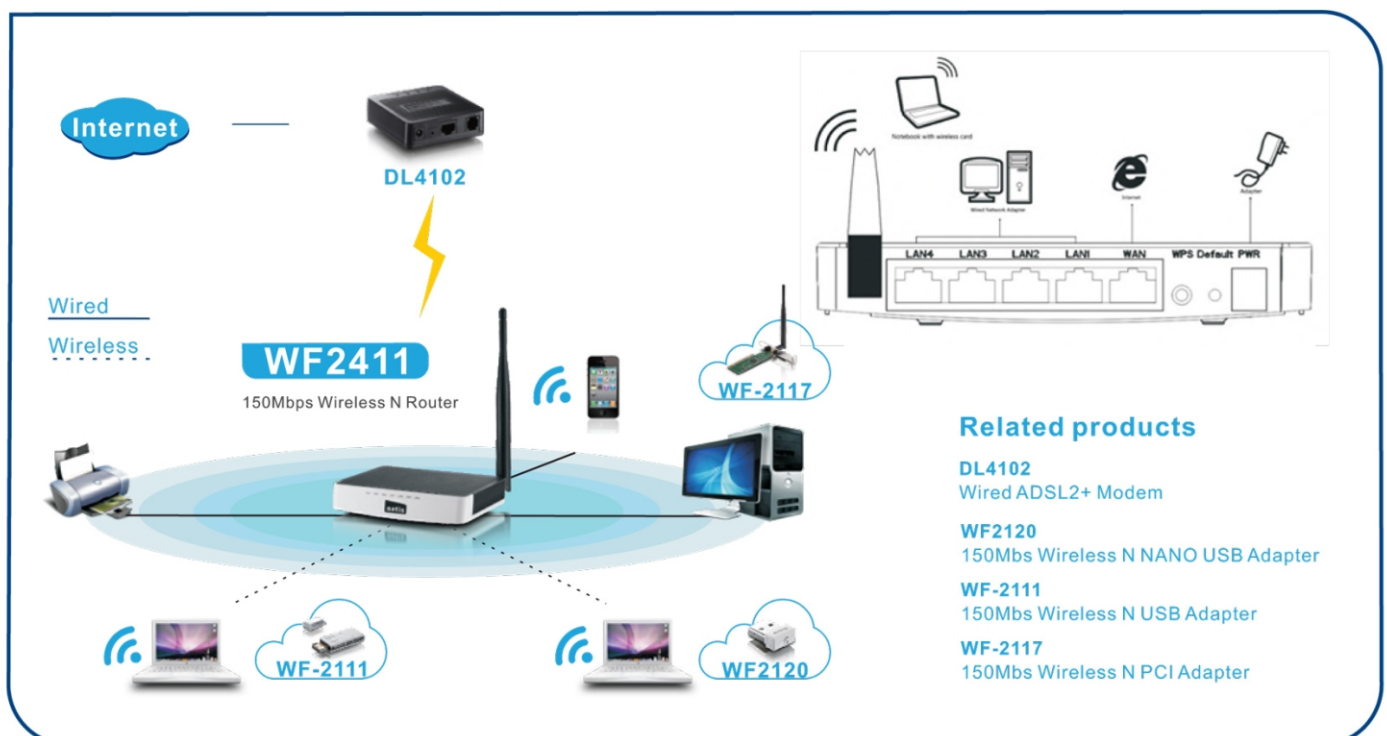

Related products

DL4102

Wired ADSL2+ Modem

WF2120

150Mbps Wireless N NANO USB Adapter

WF-2111

150Mbps Wireless N USB Adapter

WF-2117

150Mbps Wireless N PCI Adapter