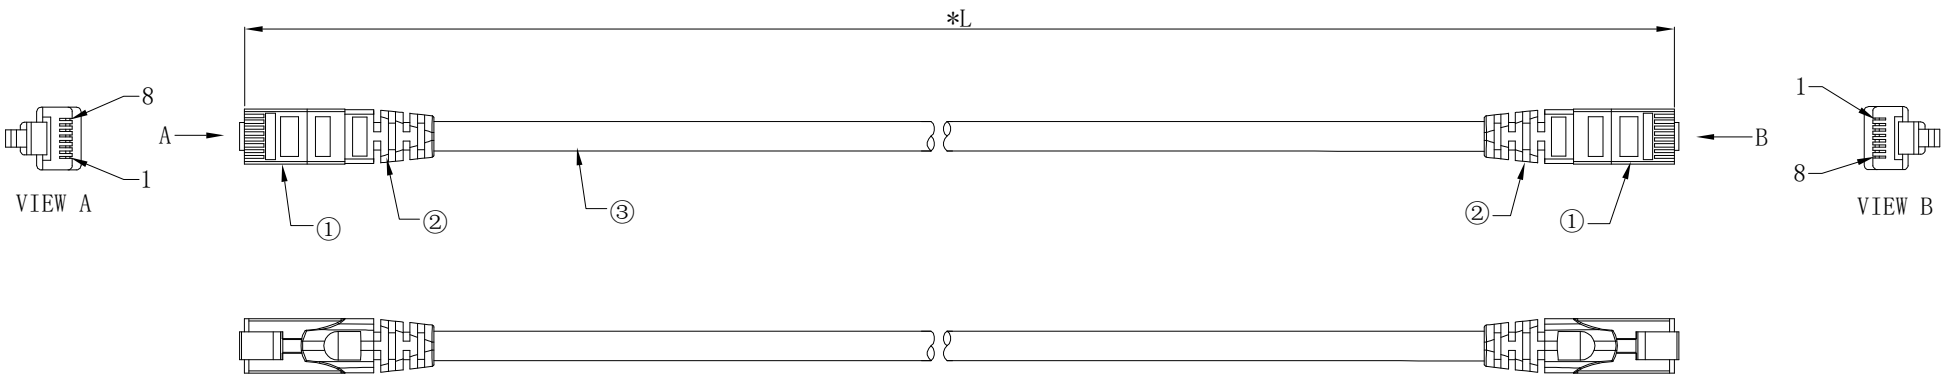

PIN OUT

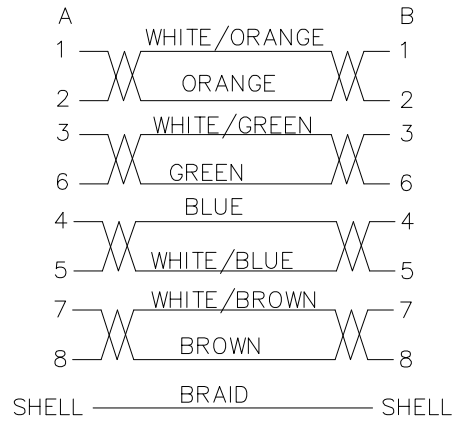

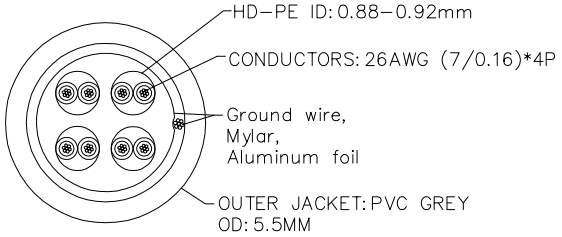

No	L	CABLE
DW-F5E-0025-GR	250±40mm	CAT.5E/FTP 26AWG, GREY
DW-F5E-005-GR	500±40mm	CAT.5E/FTP 26AWG, GREY
DW-F5E-010-GR	1000±40mm	CAT.5E/FTP 26AWG, GREY
DW-F5E-020-GR	2000±40mm	CAT.5E/FTP 26AWG, GREY
DW-F5E-030-GR	3000±40mm	CAT.5E/FTP 26AWG, GREY
DW-F5E-050-GR	5000±100mm	CAT.5E/FTP 26AWG, GREY
DW-F5E-070-GR	7000±100mm	CAT.5E/FTP 26AWG, GREY
DW-F5E-100-GR	10000±100mm	CAT.5E/FTP 26AWG, GREY

NOTES:
1. ELECTRICAL TEST:100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE:10 OHMS MAX.
3. INSULATOR RESISTANCE:5M OHMS MIN, DC 300V 0.01sec.
4. HI-POT: DC 300V 0.1sec.

NO	PART NAME	DESCRIPTION	QTY
3	Cable	CAT.5E/FTP CABLE 26AWG(7/0.16)*4P+AL+D(7/0.12BS) JACKET: PVC, GREY; OD:5.5±0.2mm	1
2	Molding	45P PVC OUTER MOLDING HOUSING, COLOR:GREY	2
1	Connector	RJ45 MALE CONNECTOR(SHIELD), PIN GOLD PLATED 3U".	2

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 -120mm ± 0.30mm

DATAWAY

PART DESCRIPTION: Patch Cable CAT5E FTP PVC 0,25m Gray Non-Snag-Proof

Appd: JIM.KING	P/N: DW-F5E-0025-GR				
Check:	Date	Scale	Unit	Type	Page
Draw: Gavin	2022.11.30	Free	MM	Z	1/1