



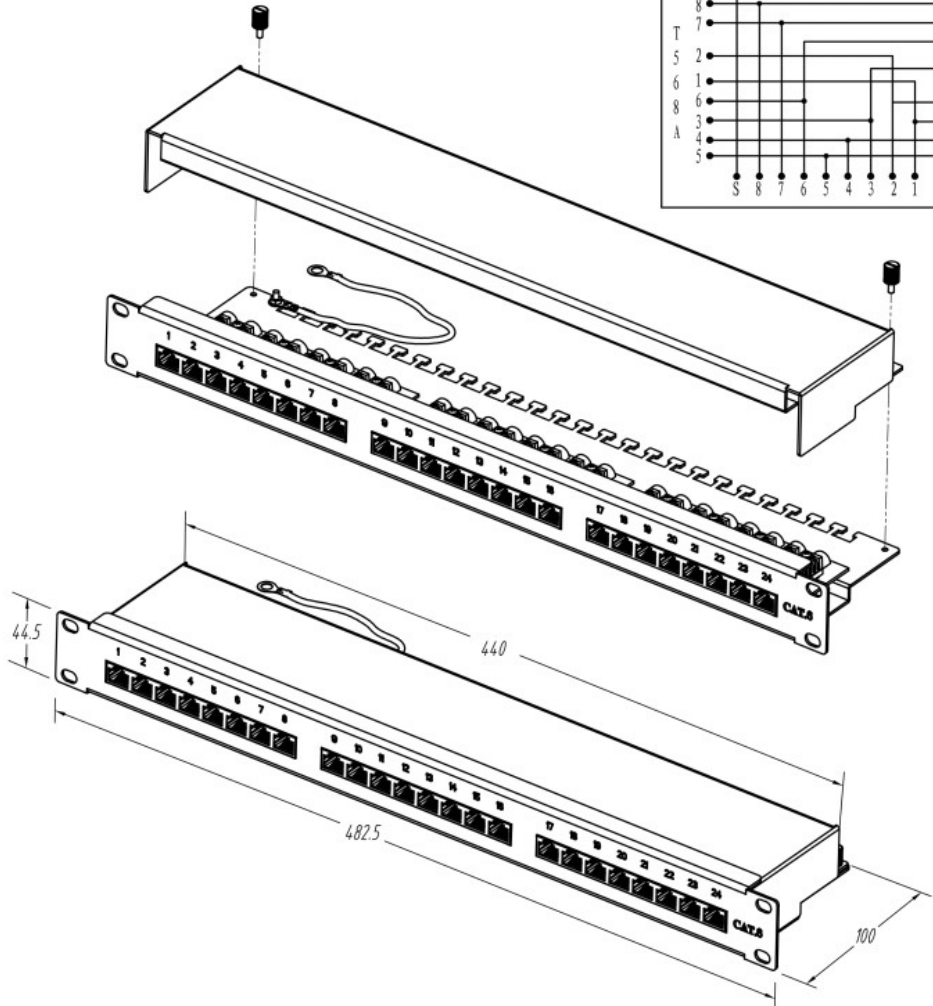

### PIN OUT



Technology request

Performance:

Meets Cat5e EIA/TIA 568B. 2-1 Standard

Materials:

Bottom Panel: 1.5mm thickness Metallic Panel(SECC)/RAL7035

Upper Panel Cover: 1.0mm thickness Metallic Panel(SECC)/RAL7035

RJ45 Jack: Housing-Fireproof PBT UL-94V0

Pin-8P8C 6 micro inches gold plated

PCB: FR-4/1.6mm UL-94V0

IDC Body: Fireproof PC/ABS UL-94V0/With Colour Coded Printing T568A/BIDC

Pin: Bronze & Tinned

IDC Terminal: For 26-28 AWG Cable

Electrical Specifications:

Insulation Resistance: 500M ohms (min.)

Contact Resistance: 20m ohms (max.)

Current Rating : 1.5 Amps

DC Resistance: 0.1 ohms(max.)

Withstanding Voltage: 1000 VAC RMS @60Hz/1 min

Mechanical Specifications:

IDC Punch Down Cycle: Over 25 Cycles (min.)

RJ45 Jack Insertion Cycle : Over 200 Cycles (min.)

Accessory:

1. M3 Screw Set, For Pre-Assembled Ground Wire

2. Cable Tie(75X1.9mm)X24Pcs

3. Instruction Sheet

4. Knurt ed Screws.

<p>-TOLERANCES- UNLESS OTHERWISE SPECIFIED</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm</p>						
			<p>PART DESCRIPTION: 19 " Patch Panel DATAWAY CAT5E STP 24x RJ45 Black 1U</p>			
	<p>Appr: JIM.KING</p>		<p>P/N: DW-PP-5E-STP-24-BK</p>			
	<p>Check:</p>	<p>Date</p>	<p>Scale</p>	<p>Unit</p>	<p>Type</p>	<p>Page</p>
<p>Draw: XIEFENG</p>	<p>2023.05.08</p>	<p>Free</p>	<p>MM</p>	<p>Z</p>	<p>1/1</p>	