



FiberPoE™

Optical Data Transport
for Outdoor PoE Devices

Model: F-POE

QUICK START GUIDE

Introduction

Thank you for purchasing the Ubiquiti Networks® FiberPoE™. This Quick Start Guide is designed to guide you through installation and also includes warranty terms.

Package Contents



FiberPoE



Self-Tapping
Screw (M5)



Serrated
Washer (M5)



Metal Straps
(Qty. 2)



Quick Start
Guide

Installation Requirements

Mounting accessories and drain wire are not included.

Pole-Mounting

- Drill with a 4.5 mm Drill Bit
- 7 mm Socket Wrench or Screwdriver

Wall-Mounting

- (2) Screws (≤ 5 mm Screw Head)
- (1) M5 Machine Screw and Nut
- (1) Drain Wire, Optional (≤ 16 AWG, ≤ 40 cm)

Cables

- Shielded Category 5 (or above) cabling should be used for all wired Ethernet connections and should be grounded through the AC ground of the PoE.

We recommend that you protect your networks from harmful outdoor environments and destructive ESD events with industrial-grade, shielded Ethernet cable from Ubiquiti Networks. For more details, visit www.ubnt.com/toughcable


TERMS OF USE: Shielded Ethernet cable and earth grounding must be used as conditions of product warranty. TOUGHcable™ is designed for outdoor installations. It is the customer's responsibility to follow local country regulations, including operation within legal frequency channels, output power, and Dynamic Frequency Selection (DFS) requirements.

Application Examples

The following are typical use cases for the F-POE.

Data Options

1. **Fiber Bridge** Two F-POE devices, one at the base and one at the top of the tower, are used to provide a fiber optic data link for protection from EMI events that can cause equipment damage or signal integrity issues.
2. **Ethernet-to-Fiber Converter** One F-POE at the top of the tower is used to convert Ethernet to fiber at the radio.

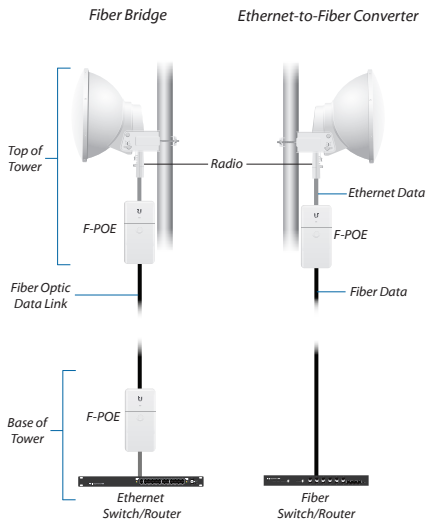


Power Options

On the tower, the F-POE can provide PoE power to the radio. Options for providing power to the F-POE include:


DC Power Connect a DC power cable to the F-POE DC terminal block.

PoE Power Connect a PoE adapter (power only) to the F-POE RJ45 port.

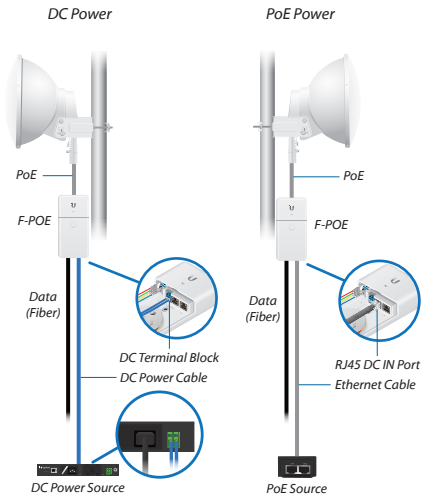


Hardware Overview

LED

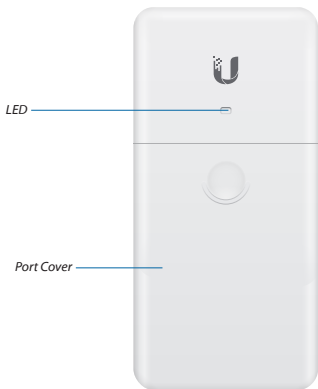

LED Color	Status
White	Power on
Blue	Link up
Flashing Blue	Activity

Ports

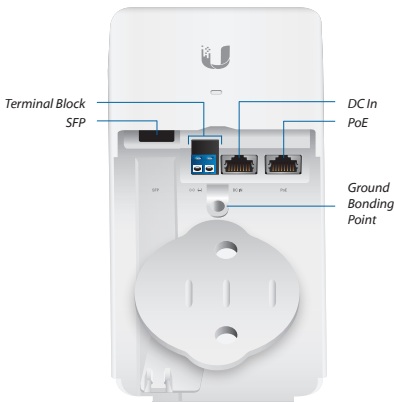

SFP This hot-swappable SFP port supports 1 Gbps SFP connections.

VDC Labeled (+) (-), the VDC terminal block provides input or output power (see the *Power Configuration* section for details).

DC In This RJ45 port is only used to supply DC input power.

PoE This RJ45 port provides 1000 Mbps data and Power over Ethernet (PoE) passthrough, and can also be used to supply input power (see the *Power Configuration* section for details).

Ground Bonding Point The FiberPoE must be grounded in one of the following ways:

- Use the *Self-Tapping Screw* and *Serrated Washer* to ground the FiberPoE directly to a grounded metal pole or structure.
- Use an M5 machine screw, the *Serrated Washer*, and a nut (not included) to attach a drain wire (not included) that is connected to a remote grounding block or structure.

Power Configuration

There are three ways to configure the input and output power:

Input Power on Terminal Block

Input Power	Output Power
<i>Terminal Block, 24V</i>	<i>PoE port, 2-pair (4, 5+; 7, 8-), 24V</i>
<i>Terminal Block, 50V</i>	<i>PoE port, 4-pair, 50V</i>



Power In *Power Out*

Input Power on PoE Port


Input Power	Output Power
<i>PoE port, 2-pair (4, 5+; 7, 8-), 24V</i>	<i>Terminal Block, 24V</i>
<i>PoE port, 4-pair, 24V</i>	<i>Terminal Block, 24V</i>
<i>PoE port, 4-pair, 50V</i>	<i>Terminal Block, 50V</i>





Power Out *Power In*

Input Power on DC In Port


Input Power	Output Power
DC In port, 2-pair (4, 5+; 7, 8-), 24V	Terminal Block, 24V PoE port, 24V, 2-pair (4, 5+; 7, 8-)
DC In port, 4-pair, 24V	Terminal Block, 24V PoE port, 24V, 4-pair
DC In port, 4-pair, 50V	Terminal Block, 50V PoE port, 50V, 4-pair



-  **Note:** You can use either a single power output (*Terminal Block* or *PoE port*), or both power outputs at the same time.
-  **Note:** The F-POE relies on the external DC power source for current-limiting protection.

Cable Management

Feed cables through the *Port Cover* as indicated below. Use nippers to remove a tab over a feed hole if necessary.

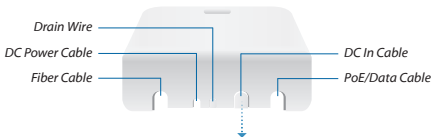


Connect a Drain Wire (Optional)

If a drain wire is used to properly ground the FiberPoE, attach it to the *Ground Bonding Point* with an M5 machine screw, the included *Serrated Washer*, and nut (not included).



 **Note:** Place the included *Serrated Washer* between the drain wire and the *Ground Bonding Point*.

At the installation site, secure the other end of the drain wire to a grounded mast, pole, tower, or grounding bar.

 **Note:** The drain wire should be as short as possible and no longer than one meter in length.

Hardware Installation


Install the FiberPoE either on a pole or a wall. Follow the appropriate steps for your installation:

Pole-Mounting

3. Feed the included *Metal Straps* through the slots located on the back of the FiberPoE.




4. Wrap the *Metal Straps* around the pole. Use a 7 mm socket wrench or screwdriver to turn the screws clockwise and securely fasten the straps to the pole.



5. Remove the *Port Cover* by pressing on its center and sliding it down.



 **Note:** If you are using a drain wire for grounding, proceed to the *Connecting Input Power* section.

6. Drill a 4.5 mm pilot hole into the pole through the center of the *Ground Bonding Point* of the FiberPoE.




7. Insert the *Self-Tapping Screw* into the *Serrated Washer* (both included) and pilot hole. Securely fasten the screw to ensure the *Ground Bonding Point* is bonded to the pole.




Wall-Mounting

1. Secure two screws (not included) to the wall, spaced 38 mm apart. Leave a gap of 3 mm from each screw head to the wall.



2. With the drain wire already attached, guide the screw heads into the keyhole slots on the back of the FiberPoE. Press down on the FiberPoE to secure it.



Connecting Input Power

- ! WARNING:** Do not connect more than one DC source to the FiberPoE at one time.


Follow the instructions for the type of input power you will be using:

Power via Terminal Block

- Note:** When the *Terminal Block* provides input power, the *PoE* port provides 2-pair PoE output if the input voltage is 24V, or 4-pair PoE output if the input voltage is 50V.

1. Connect a DC power cable to the *Terminal Block*.



-  **Note:** The *Terminal Block* supports polarity autocorrection; however, if the DC power cable is connected as marked, the PoE polarity will be 1, 2, 3, 6+; 4, 5, 7, 8-.

2. (Optional) Create a strain relief for the cable by feeding a cable tie (not included) through the cable relief slot on the reel.



3. Connect the other end of the cable to a DC power supply.
4. Connect the DC power supply to its power source.



640-00188-03

Power via DC In Port


1. Connect an Ethernet cable to the *DC In* port.



2. (Optional) Create a strain relief for the cable by feeding a cable tie (not included) through the cable relief slot on the reel.



3. Connect the other end of the Ethernet cable to a PoE power source.

 **Note:** The RJ45 *DC In* port does not support data. Its only use is to provide power.

Power via PoE Port

1. Connect an Ethernet cable to the *PoE* port.



2. (Optional) Create a strain relief for the cable by feeding a cable tie (not included) through the cable relief slot on the reel.




3. Connect the other end of the Ethernet cable to a PoE power and data source.

Connecting Fiber


1. Plug a fiber SFP module into the SFP port.



2. Remove the jacket from the fiber optic cable and connect a strand of fiber optic cable to the SFP module.

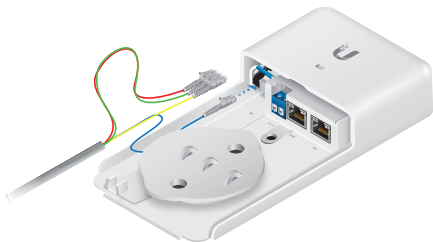

3. Spool the fiber optic strands around the strain relief reel in a counterclockwise direction.

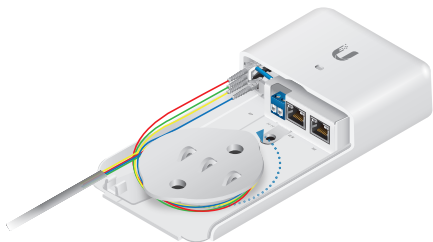


4. Continue until the jacketed cable spools onto the reel for at least 1½ turns. Snap the cable into the clip to secure it.




5. Connect the other end of the fiber optic cable to another fiber device.

For information about compatible fiber SFP modules and accessories, visit: ubnt.com


Connecting Ethernet

-  **Note:** Skip this section if you connected PoE input power in the *Power Via PoE Port* section (you already have an Ethernet data connection).


1. Connect an Ethernet cable to the *PoE* port.



2. (Optional) Create a strain relief for the cable by feeding a cable tie (not included) through the cable relief slot on the reel.



3. Connect the other end of the cable to an Ethernet device.

-  **WARNING:** If the *PoE* port is providing PoE passthrough power, ensure that the connected device supports PoE and the supplied voltage.

Specifications

FiberPoE	
Dimensions (Excluding Mount)	196.4 x 93.5 x 32.4 mm (7.73 x 3.68 x 1.28")
Weight	288 g (10.2 oz)
Enclosure	White Polycarbonate
Interface Connections	(1) 1 Gbps SFP Port (1) DC Terminal Block (1) DC RJ45 Port, 4-Pair DC Injection (1) 1000 Mbps Ethernet PoE Port, 4-Pair (24VDC or 50VDC Input) or 2-Pair (4, 5+; 7, 8-) (24VDC Input) PoE Passthrough
Typical Power Consumption	1.5W
Power Method	DC Injection From: RJ45 DC In Port, 2-Pair or 4-Pair PoE Capability RJ45 PoE Port, 4-Pair PoE Capability DC Terminal Block
PoE/DC Output	RJ45 PoE Port, 4-Pair (50VDC Input) or 2-Pair or 4-Pair (24VDC Input) Passthrough DC Terminal Block
Input DC Voltage	16 to 57V
Operating Temperature	-40 to 60° C (-40 to 140° F)
Operating Humidity	10 to 95% Noncondensing
ESD/EMP Protection	± 24KV Contact / Air for Ethernet
Certifications	CE, FCC, IC

Safety Notices

1. Read, follow, and keep these instructions.
2. Heed all warnings.
3. Only use attachments/accessories specified by the manufacturer.



WARNING: Do not use this product in location that can be submerged by water.



WARNING: Avoid using this product during an electrical storm. There may be a remote risk of electric shock from lightning.

Electrical Safety Information

1. Compliance is required with respect to voltage, frequency, and current requirements indicated on the manufacturer's label. Connection to a different power source than those specified may result in improper operation, damage to the equipment or pose a fire hazard if the limitations are not followed.
2. There are no operator serviceable parts inside this equipment. Service should be provided only by a qualified service technician.

Limited Warranty

UBIQUITI NETWORKS, Inc (“UBIQUITI NETWORKS”) warrants that the product(s) furnished hereunder (the “Product(s)”) shall be free from defects in material and workmanship for a period of one (1) year from the date of shipment by UBIQUITI NETWORKS under normal use and operation. UBIQUITI NETWORKS’ sole and exclusive obligation and liability under the foregoing warranty shall be for UBIQUITI NETWORKS, at its discretion, to repair or replace any Product that fails to conform to the above warranty during the above warranty period. The expense of removal and reinstallation of any Product is not included in this warranty. The warranty period of any repaired or replaced Product shall not extend beyond its original term.

Warranty Conditions

The above warranty does not apply if the Product:

- (I) has been modified and/or altered, or an addition made thereto, except by Ubiquiti Networks, or Ubiquiti Networks’ authorized representatives, or as approved by Ubiquiti Networks in writing;
- (II) has been painted, rebranded or physically modified in any way;
- (III) has been damaged due to errors or defects in cabling;
- (IV) has been subjected to misuse, abuse, negligence, abnormal physical, electromagnetic or electrical stress, including lightning strikes, or accident;
- (V) has been damaged or impaired as a result of using third party firmware;
- (VI) has no original Ubiquiti MAC label, or is missing any other original Ubiquiti label(s); or
- (VII) has not been received by Ubiquiti within 30 days of issuance of the RMA.

In addition, the above warranty shall apply only if: the product has been properly installed and used at all times in accordance, and in all material respects, with the applicable Product documentation; all Ethernet cabling runs use CAT5 (or above), and for outdoor installations, shielded Ethernet cabling is used, and for indoor installations, indoor cabling requirements are followed.

Returns

No Products will be accepted for replacement or repair without obtaining a Return Materials Authorization (RMA) number from UBIQUITI NETWORKS during the warranty period, and the Products being received at UBIQUITI NETWORKS’ facility freight prepaid in accordance with the RMA process of UBIQUITI NETWORKS. Products returned without an RMA number will not be processed and will be returned freight collect or subject to disposal. Information on the RMA process and obtaining an RMA number can be found at: www.ubnt.com/support/warranty.

Disclaimer

EXCEPT FOR ANY EXPRESS WARRANTIES PROVIDED HEREIN, UBIQUITI NETWORKS, ITS AFFILIATES, AND ITS AND THEIR THIRD PARTY DATA, SERVICE, SOFTWARE AND HARDWARE PROVIDERS HEREBY DISCLAIM AND MAKE NO OTHER REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, REPRESENTATIONS, GUARANTEES, OR WARRANTIES OF MERCHANTABILITY, ACCURACY, QUALITY OF SERVICE OR RESULTS, AVAILABILITY, SATISFACTORY QUALITY, LACK OF VIRUSES, QUIET ENJOYMENT, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT AND ANY WARRANTIES ARISING FROM ANY COURSE OF DEALING, USAGE OR TRADE PRACTICE IN CONNECTION WITH SUCH PRODUCTS AND SERVICES. BUYER ACKNOWLEDGES THAT NEITHER UBIQUITI NETWORKS NOR ITS THIRD PARTY PROVIDERS CONTROL BUYER'S EQUIPMENT OR THE TRANSFER OF DATA OVER COMMUNICATIONS FACILITIES, INCLUDING THE INTERNET, AND THAT THE PRODUCTS AND SERVICES MAY BE SUBJECT TO LIMITATIONS, INTERRUPTIONS, DELAYS, CANCELLATIONS AND OTHER PROBLEMS INHERENT IN THE USE OF COMMUNICATIONS FACILITIES. UBIQUITI NETWORKS, ITS AFFILIATES AND ITS AND THEIR THIRD PARTY PROVIDERS ARE NOT RESPONSIBLE FOR ANY INTERRUPTIONS, DELAYS, CANCELLATIONS, DELIVERY FAILURES, DATA LOSS, CONTENT CORRUPTION, PACKET LOSS, OR OTHER DAMAGE RESULTING FROM ANY OF THE FOREGOING. In addition, UBIQUITI NETWORKS does not warrant that the operation of the Products will be error-free or that operation will be uninterrupted. In no event shall UBIQUITI NETWORKS be responsible for damages or claims of any nature or description relating to system performance, including coverage, buyer's selection of products (including the Products) for buyer's application and/or failure of products (including the Products) to meet government or regulatory requirements.

Limitation of Liability

EXCEPT TO THE EXTENT PROHIBITED BY LOCAL LAW, IN NO EVENT WILL UBIQUITI OR ITS SUBSIDIARIES, AFFILIATES OR SUPPLIERS BE LIABLE FOR DIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES (INCLUDING LOST PROFIT, LOST DATA, OR DOWNTIME COSTS), ARISING OUT OF THE USE, INABILITY TO USE, OR THE RESULTS OF USE OF THE PRODUCT, WHETHER BASED IN WARRANTY, CONTRACT, TORT OR OTHER LEGAL THEORY, AND WHETHER OR NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Note

Some countries, states and provinces do not allow exclusions of implied warranties or conditions, so the above exclusion may not apply to you. You may have other rights that vary from country to country, state to state, or province to province. Some countries, states and provinces do not allow the exclusion or limitation of liability for incidental or consequential damages, so the above limitation may not apply to you. EXCEPT TO THE EXTENT ALLOWED BY LOCAL LAW, THESE WARRANTY TERMS DO NOT EXCLUDE, RESTRICT OR MODIFY, AND ARE IN ADDITION TO, THE MANDATORY STATUTORY RIGHTS APPLICABLE TO THE LICENSE OF ANY SOFTWARE (EMBEDDED IN THE PRODUCT) TO YOU. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to any transactions regarding the sale of the Products.

Compliance

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Industry Canada

CAN ICES-3(A)/NMB-3(A)

This Class A digital apparatus complies with Canadian CAN ICES-003.

CAN ICES-3(A)/NMB-3(A)

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

Australia and New Zealand



Warning: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

CE Marking

CE marking on this product represents the product is in compliance with all directives that are applicable to it.



RoHS/WEEE Compliance Statement



English

European Directive 2002/96/EC requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

Deutsch

Die Europäische Richtlinie 2002/96/EC verlangt, dass technische Ausrüstung, die direkt am Gerät und/oder an der Verpackung mit diesem Symbol versehen ist, nicht zusammen mit unsortiertem Gemeindeabfall entsorgt werden darf. Das Symbol weist darauf hin, dass das Produkt von regulärem Haushaltsmüll getrennt entsorgt werden sollte. Es liegt in Ihrer Verantwortung, dieses Gerät und andere elektrische und elektronische Geräte über die dafür zuständigen und von der Regierung oder örtlichen Behörden dazu bestimmten Sammelstellen zu entsorgen. Ordnungsgemäßes Entsorgen und Recyceln trägt dazu bei, potentielle negative Folgen für Umwelt und die menschliche Gesundheit zu vermeiden. Wenn Sie weitere Informationen zur Entsorgung Ihrer Altgeräte benötigen, wenden Sie sich bitte an die örtlichen Behörden oder städtischen Entsorgungsdienste oder an den Händler, bei dem Sie das Produkt erworben haben.

Español

La Directiva 2002/96/CE de la UE exige que los equipos que lleven este símbolo en el propio aparato y/o en su embalaje no deben eliminarse junto con otros residuos urbanos no seleccionados. El símbolo indica que el producto en cuestión debe separarse de los residuos domésticos convencionales con vistas a su eliminación. Es responsabilidad suya desechar este y cualesquiera otros aparatos eléctricos y electrónicos a través de los puntos de recogida que ponen a su disposición el gobierno y las autoridades locales. Al desechar y reciclar correctamente estos aparatos estará contribuyendo a evitar posibles consecuencias negativas para el medio ambiente y la salud de las personas. Si desea obtener información más detallada sobre la eliminación segura de su aparato usado, consulte a las autoridades locales, al servicio de recogida y eliminación de residuos de su zona o pregunte en la tienda donde adquirió el producto.

Français

La directive européenne 2002/96/CE exige que l'équipement sur lequel est apposé ce symbole sur le produit et/ou son emballage ne soit pas jeté avec les autres ordures ménagères. Ce symbole indique que le produit doit être éliminé dans un circuit distinct de celui pour les déchets des ménages. Il est de votre responsabilité de jeter ce matériel ainsi que tout autre matériel électrique ou électronique par les moyens de collecte indiqués par le gouvernement et les pouvoirs publics des collectivités territoriales. L'élimination et le recyclage en bonne et due forme ont pour but de lutter contre l'impact néfaste potentiel de ce type de produits sur l'environnement et la santé publique. Pour plus d'informations sur le mode d'élimination de votre ancien équipement, veuillez prendre contact avec les pouvoirs publics locaux, le service de traitement des déchets, ou l'endroit où vous avez acheté le produit.

Italiano

La direttiva europea 2002/96/EC richiede che le apparecchiature contrassegnate con questo simbolo sul prodotto e/o sull'imballaggio non siano smaltite insieme ai rifiuti urbani non differenziati. Il simbolo indica che questo prodotto non deve essere smaltito insieme ai normali rifiuti domestici. È responsabilità del proprietario smaltire sia questi prodotti sia le altre apparecchiature elettriche ed elettroniche mediante le specifiche strutture di raccolta indicate dal governo o dagli enti pubblici locali. Il corretto smaltimento ed il riciclaggio aiuteranno a prevenire conseguenze potenzialmente negative per l'ambiente e per la salute dell'essere umano. Per ricevere informazioni più dettagliate circa lo smaltimento delle vecchie apparecchiature in Vostro possesso, Vi invitiamo a contattare gli enti pubblici di competenza, il servizio di smaltimento rifiuti o il negozio nel quale avete acquistato il prodotto.

Declaration of Conformity

Česky [Czech]	UBIQUITI NETWORKS tímto prohlašuje, že toto UBIQUITI NETWORKS zařízení, je ve shod se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
Dansk [Danish]	Hermed, UBIQUITI NETWORKS, erklærer at denne UBIQUITI NETWORKS enhed, er i overensstemmelse med de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
Nederlands [Dutch]	Hierbij verklaart UBIQUITI NETWORKS, dat deze UBIQUITI NETWORKS apparaat, in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EC.
English	Hereby, UBIQUITI NETWORKS, declares that this UBIQUITI NETWORKS device, is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Eesti [Estonian]	Käesolevaga UBIQUITI NETWORKS kinnitab, et antud UBIQUITI NETWORKS seade, on vastavus oluliste nõuetele ja teistele asjakohastele sätetele direktiivi 1999/5/EÜ.
Suomi [Finnish]	Täten UBIQUITI NETWORKS vakuuttaa, että tämä UBIQUITI NETWORKS laite, on yhdenmukainen olennaisten vaatimusten ja muiden sitä koskevien direktiivin 1999/5/EY.
Français [French]	Par la présente UBIQUITI NETWORKS déclare que l'appareil UBIQUITI NETWORKS, est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
Deutsch [German]	Hiermit erklärt UBIQUITI NETWORKS, dass sich dieses UBIQUITI NETWORKS Gerät, in Übereinstimmung mit den grundlegenden Anforderungen und den anderen relevanten Vorschriften der Richtlinie 1999/5/EG befindet.
Ελληνική [Greek]	Δια του παρόντος, UBIQUITI NETWORKS, δηλώνει ότι αυτή η συσκευή UBIQUITI NETWORKS, είναι σε συμμόρφωση με τις βασικές απαιτήσεις και τις λοιπές σχετικές διατάξεις της οδηγίας 1995/5/EK.
Magyar [Hungarian]	Ezennel UBIQUITI NETWORKS kijelenti, hogy ez a UBIQUITI NETWORKS készülék megfelel az alapvető követelményeknek és más vonatkozó 1999/5/EK irányelv rendelkezéseit.
Íslenska [Icelandic]	Hér, UBIQUITI NETWORKS, því yfir að þetta UBIQUITI NETWORKS tæki er í samræmi við grunnkröfur og önnur viðeigandi ákvæði tilskipun 1999/5/EC.
Italiano [Italian]	Con la presente, UBIQUITI NETWORKS, dichiara che questo dispositivo UBIQUITI NETWORKS, è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti della direttiva 1999/5/CE.
Latviski [Latvian]	Ar šo, UBIQUITI NETWORKS, deklarē, ka UBIQUITI NETWORKS ierīce, ir saskaņā ar būtiskajām prasībām un citiem attiecīgiem noteikumiem Direktīvā 1999/5/EK.
Lietuviškai [Lithuanian]	UBIQUITI NETWORKS deklaruoja, kad šis UBIQUITI NETWORKS įrenginys atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Malti [Maltese]	Hawnhekk, UBIQUITI NETWORKS, tiddikjara li dan il-mezz UBIQUITI NETWORKS huwa konformi mar-rekwiżiti essenzjali u dispożizzjonijiet rilevanti oħrajn ta' Direttiva 1999/5/EC.
Norsk [Norwegian]	Herved UBIQUITI NETWORKS, erklærer at denne UBIQUITI NETWORKS enheten, er i samsvar med de grunnleggende kravene og andre relevante bestemmelser i direktiv 1999/5/EF.
Slovensky [Slovak]	Týmto UBIQUITI NETWORKS, prehlasuje, že toto UBIQUITI NETWORKS zariadenie, je v súlade so základnými požiadavkami a ďalšími relevantnými ustanoveniami smernice 1999/5/ES.
Svenska [Swedish]	Härmed UBIQUITI NETWORKS, intygar att denna UBIQUITI NETWORKS enhet är i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.
Español [Spanish]	Por medio de la presente UBIQUITI NETWORKS declara que este dispositivo UBIQUITI NETWORKS, cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
Polski [Polish]	Niniejszym, Ubiquiti Networks, oświadcza, że urządzenie UBIQUITI NETWORKS, jest zgodny z zasadniczymi wymaganiami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
Português [Portuguese]	UBIQUITI NETWORKS declara que este dispositivo UBIQUITI NETWORKS, está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
Română [Romanian]	Prin prezenta, UBIQUITI NETWORKS declară că acest dispozitiv UBIQUITI NETWORKS este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivei 1999/5/CE.

Online Resources

Support support.ubnt.com

Community community.ubnt.com

Downloads downloads.ubnt.com



www.ubnt.com